

# ICX BACKHOE LOADER.

## 1. Visibly better

Great forward visibility – courtesy of a steep-nosed bonnet and front-mounted loader arms – makes operating a JCB ICX safe and confidence-inspiring.

## 2. Higher standards of lowering

Unlike rival skid steers, the ICX's loader offers parallel lift whether raising or lowering.

## 3. End to end

A swivel seat allows operators to face either the loader or the excavator end, offering more versatility than a conventional skid steer.

## 4. Boom and dipper

We've designed the ICX with an equal-length boom and dipper. This makes for maximum trench length and minimal machine repositioning.



## 5. Agile performance

This backhoe is nimble enough to manoeuvre in tight spaces and confined areas.

## 6. In the city

Supreme mobility makes this a perfect machine for working on restricted sites in city centres, like underground digs.

This backhoe is smoother, more powerful and more productive than an ordinary skid steer with attachment.



As the ultimate 2-in-1 machine, the ICX can save you time and money.



A versatile machine, made even more so by a vast range of attachments.



The ICX uses less fuel than alternative machines, further reducing running costs.

		ICX
Operating weight	kg	3254
Gross engine power	kW (hp)	37.3 (50)
Dig depth	ret/ext m	2.55 / 3.05
Steer mode		Skid Steer
Loader shovel breakout	kgf	2350
Maximum loader shovel capacity	m <sup>3</sup>	0.28
Maximum dipper tearout	ret/ext kgf	1488
Maximum bucket tearout	kgf	2350




## ATTACHMENTS.

JCB ATTACHMENTS ARE DESIGNED TO MEET THE EXACT REQUIREMENTS OF OUR MACHINERY FOR OPTIMUM PRODUCTIVITY. FROM BUCKETS TO SHOVELS, HANDHELD HYDRAULIC TOOLS, COMPACTION EQUIPMENT AND PATCH PLANERS, WE'VE GOT THE RIGHT ATTACHMENTS FOR ANY JCB BACKHOE LOADER YOU CHOOSE.

For added versatility, you can use your backhoe loader as a power source for a whole range of handheld tools.



Sweeper collectors.

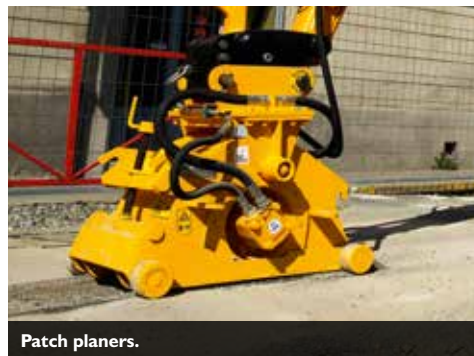

Patch planers.



Earth drill.



Hammers.

		HAMMERMASTER HMI15	HAMMERMASTER HMI66Q	HAMMERMASTER HM266Q	HAMMERMASTER HM386Q	HAMMERMASTER HM496Q	EARTH DRILL
Weight	kg	110	162	224	329	480	105 + Flight
Carrier weight	t	45	2.0 - 4.5	2.8 - 6.0	4.5 - 9.0	6.0 - 12	2.0 - 8.0
Impact energy (published)	J	1.0 - 3.5	252	376	600	850	3500 - 6000 Nm Torque
Blow rate min - max	bpm	200	1020 - 1750	840 - 1400	600 - 1380	540 - 1250	N/A

		SWEeper COLLECTOR	PATCH PLANER	KERBMASTER	COMPACTOR	FORKS/FRAMES
Width	mm	1500 - 2400	400	N/A	305	75-125
Capacity	m <sup>3</sup>	0.37 - 0.4	N/A	180 kg	N/A	1 - 4 t per fork
Weight	kg	700 - 850	500	65 - 98	178	115

		GENERAL PURPOSE BUCKET	DITCH MAINTENANCE BUCKET	GENERAL PURPOSE SHOVEL	6-IN-1 SHOVEL	SIDE TIP SHOVEL
Width	mm	230 - 900	1200 - 1520	1850 - 2440	1850 - 2440	1850
Capacity	m <sup>3</sup>	0.028 - 0.2	0.12 - 0.18	0.45 - 1.1	0.16 - 1.3	0.62
Weight	kg	52 - 179	116 - 172	153 - 527	190 - 457	500

		RIBBED BUCKET	TAPER DITCH BUCKET	JAW BUCKET	TILTING GRADING BUCKET	SNOWBLADE
Width	mm	250 - 900	305 - 1676	24	1525	2290
Capacity	m <sup>3</sup>	0.04 - 0.12	0.06 - 0.1	0.2	0.16	N/A
Weight	kg	105 - 210	111 - 185	280	340	490

\*Attachments suitability varies by machine model and specification.



Ditching buckets.



Side-tip shovels.



Trapezoidal buckets.



Kerbmasters.



## LIVELINK, WORK SMARTER.

**LIVELINK IS AN INNOVATIVE SOFTWARE SYSTEM THAT LETS YOU MANAGE JCB MACHINES REMOTELY – ONLINE, BY EMAIL OR BY MOBILE PHONE. ACCESS EVERYTHING FROM MACHINE ALERTS TO FUEL REPORTS AND HISTORY INFORMATION, WITH ALL DATA STORED AT A SECURE CENTRE.**

### Productivity and cost benefits

By providing information like idle time monitoring and machine fuel consumption, JCB Livelink helps reduce your fuel usage, saving money and improving productivity. Machine location information can help improve efficiency and perhaps even reduce insurance costs.



### Maintenance benefits

Manage machine maintenance easily – accurate hours monitoring and service alerts improve maintenance planning, while real-time location data helps you manage your fleet. Critical machine alerts and maintenance history records are also available.



### Security benefits

Livelink's real-time geofencing alerts tell you when machines move out of predetermined zones, and real-time curfew alerts inform you of unauthorised usage, straight to your mobile phone. Further benefits include real-time location information, and LiveLink has its own internal battery and aerial.



## VALUE ADDED.

JCB'S WORLDWIDE CUSTOMER SUPPORT IS FIRST CLASS. WHATEVER YOU NEED AND WHEREVER YOU ARE, WE'LL BE AVAILABLE QUICKLY AND EFFICIENTLY TO HELP MAKE SURE YOUR MACHINERY IS PERFORMING TO ITS FULL POTENTIAL.




**1** Our Technical Support Service provides instant access to factory expertise, day or night, while our Finance and Insurance teams are always on hand to provide fast, flexible, competitive quotes.

**2** The global network of JCB Parts Centres is another model of efficiency; with 15 regional bases, we can deliver around 95% of all parts anywhere in the world within 24 hours. Our genuine JCB parts are designed to work in perfect harmony with your machine for optimum performance and productivity.



**3** JCB Assetcare offers comprehensive extended warranties and service agreements, as well as service-only or repair and maintenance contracts. Irrespective of what you opt for, our maintenance teams around the world charge competitive labour rates, and offer non-obligation quotations as well as fast, efficient insurance repair work.

*Note: JCB LIVELINK and JCB ASSETCARE may not be available in your region, so please check with your local dealer.*

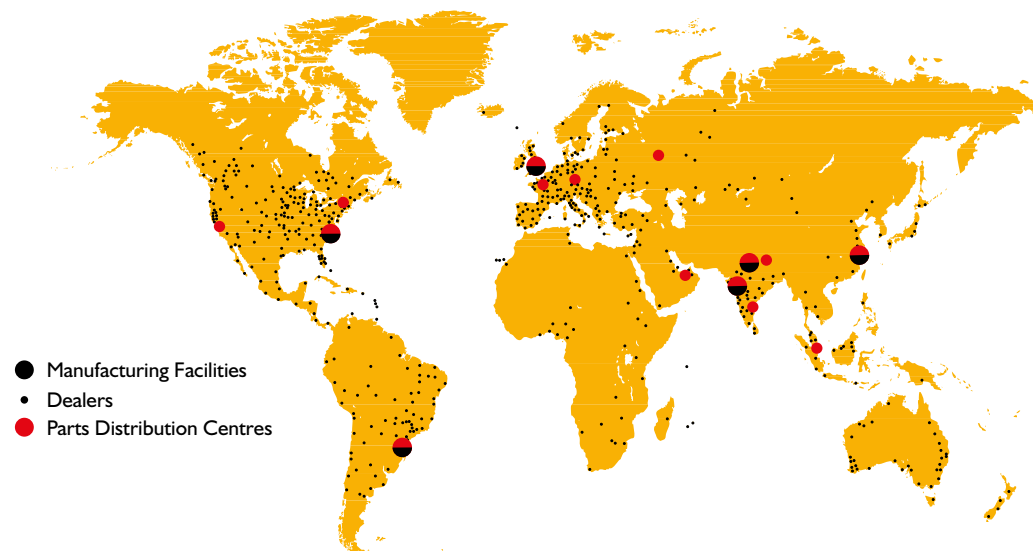





**ONE COMPANY, OVER 300 MACHINES.**

Your nearest JCB dealer

## BACKHOE LOADER RANGE

JCB Sales Limited, Rocester, Staffordshire, United Kingdom ST14 5JP.

Tel: +44 (0)1889 590312 Email: [salesinfo@jcb.com](mailto:salesinfo@jcb.com)

Download the very latest information on this product range at: [www.jcb.com](http://www.jcb.com)

©2009 JCB Sales. All rights reserved. No part of this publication may be reproduced, stored in a retrieval system, or transmitted in any form or by any other means, electronic, mechanical, photocopying or otherwise, without prior permission from JCB Sales. All references in this publication to operating weights, sizes, capacities and other performance measurements are provided for guidance only and may vary dependant upon the exact specification of machine. They should not therefore be relied upon in relation to suitability for a particular application. Guidance and advice should always be sought from your JCB Dealer. JCB reserves the right to change specifications without notice. Illustrations and specifications shown may include optional equipment and accessories. All images are correct at time of print. The JCB logo is a registered trademark of J C Bamford Excavators Ltd.

